

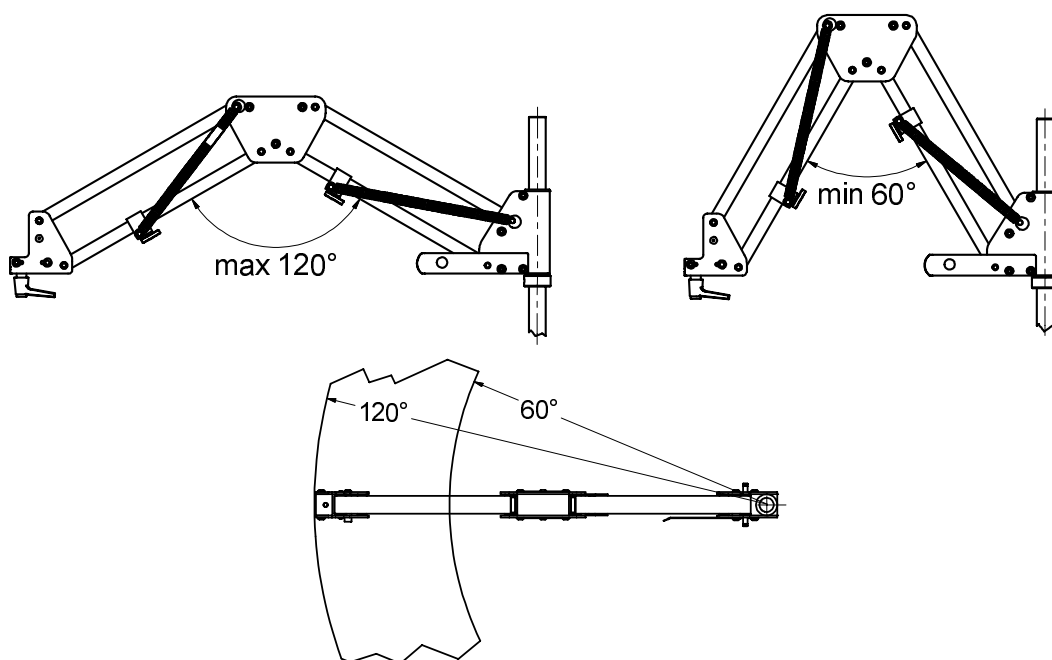


Produktöversikt Parallellarmen

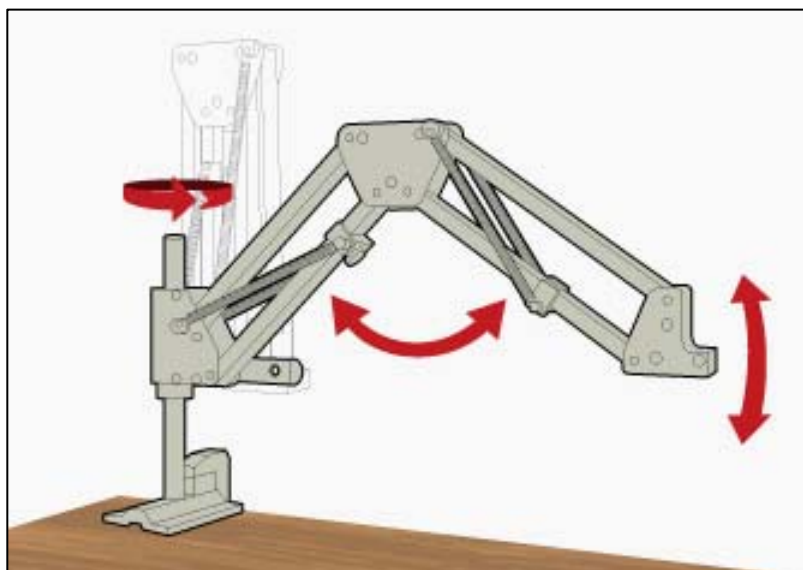




	Utbalanserings- kapacitet (kg)	Vridmoment (Nm)	Max rek. arbetsradie (mm)	Min rek. arbetsradie (mm)	Rek. vertikal arbetsrörelse (mm)
PA2-0300	2,5	20	640	440	100
PA2-0400	2,5	20	780	520	100
PA1-0400	10	70	920	630	100
PA1-0500	10	70	1100	730	100

Produktöversikt Vikarmen

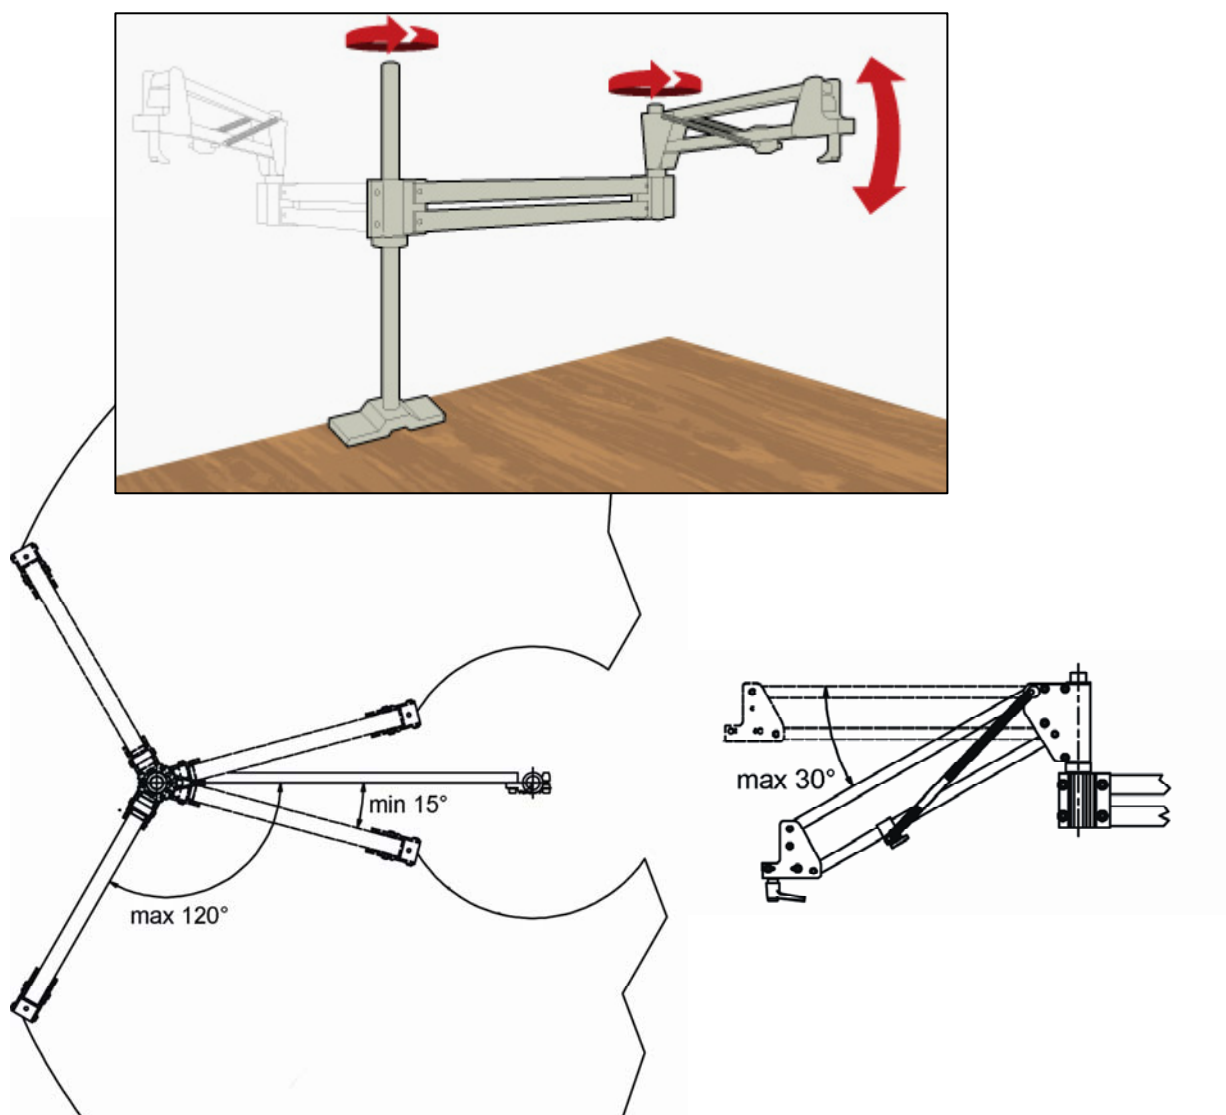

	Utbalanserings- kapacitet (kg)	Vridmoment (Nm)	Max rek. arbetsradie (mm)	Min rek. arbetsradie (mm)	Rek. vertikal arbetsrörelse (mm)
PS3-0750	1	3,5	670	135	180
PS3-0900	1	3,5	805	230	180
PS2-0750	2,5	20	710	110	180
PS2-0900	2,5	20	840	200	180
PS1-1000	10	70	985	295	250
PS1-1200	10	70	1160	400	250
PS-100	10	100	2000	1000	500
PS-300	15	300	2000	1000	500

Produktöversikt Rälsarmen

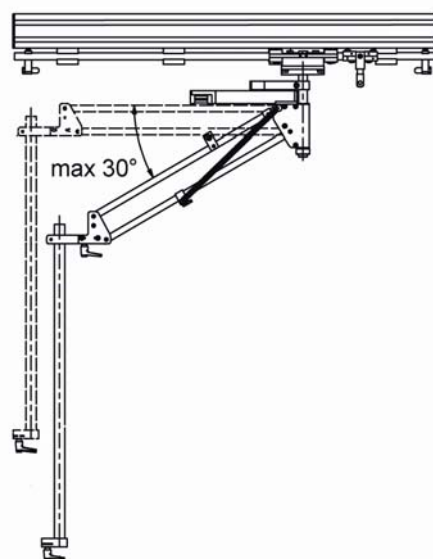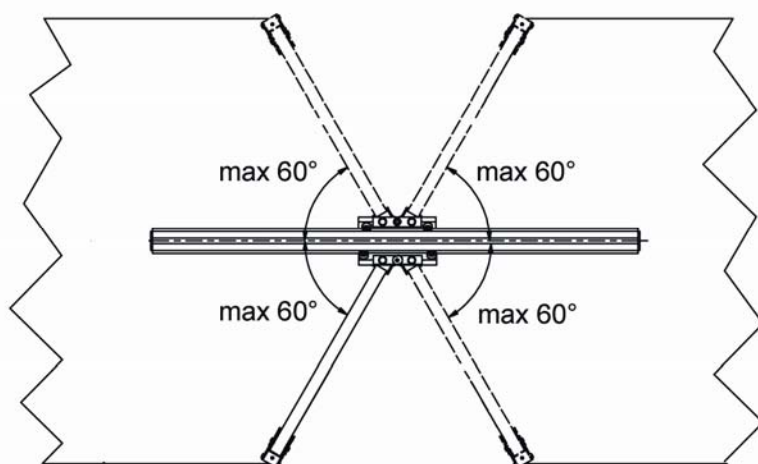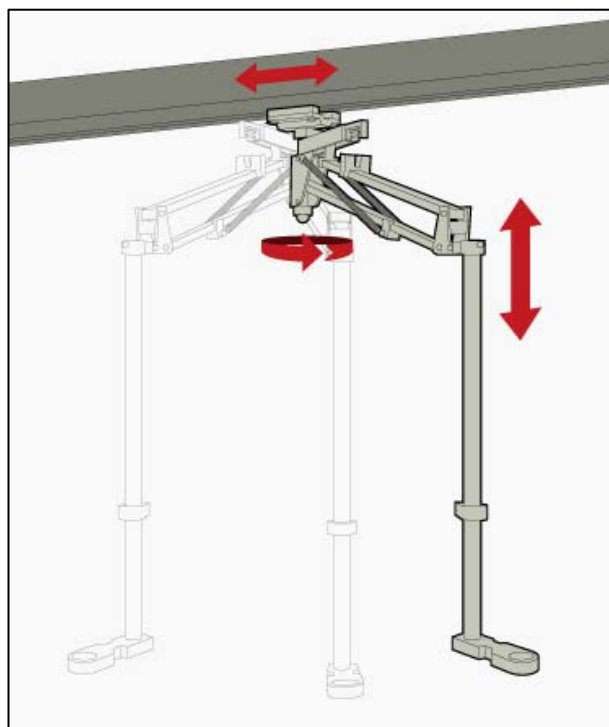

	Utbalanserings- kapacitet (kg)	Vridmoment (Nm)	Max rek. arbetsradie (mm)	Rek. vertikal arbetsrörelse (mm)
PR3-0500	1	3,5	+/- 440	180
PR2-0550	2,5	20	+/- 460	180
PR1-0500	5	50	+/- 500	250

PEARSON Armarna



PA1 70Nm



PA2 20Nm



PS1 70Nm



PS2 20Nm



PS-100 100Nm



PS3 3,5Nm




PR1 50Nm



PR2 20Nm



PR3 3,5Nm

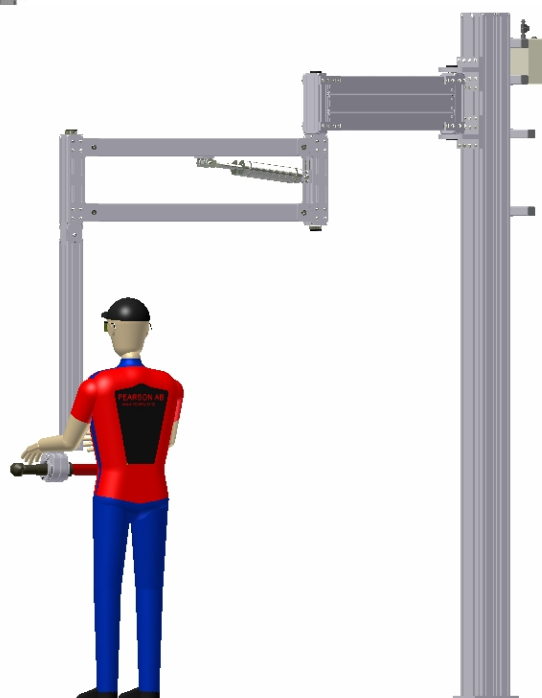

PS-300 300Nm