



RediPower



- ▶ BELT SANDER
- ▶ PONCEUSE À BANDE
- ▶ BANDSCHLEIFER
- ▶ LIJADORA DE BANDA
- ▶ LEVIGATRICE A NASTRO
- ▶ LIXADEIRA DE CINTA
- ▶ ЛЕНТОЧНАЯ ШЛИФМАШИНКА
- ▶ 砂带磨


RP9779
RP9780

Professional Tools


BELT SANDER





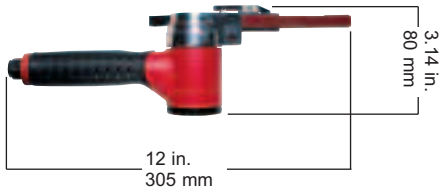

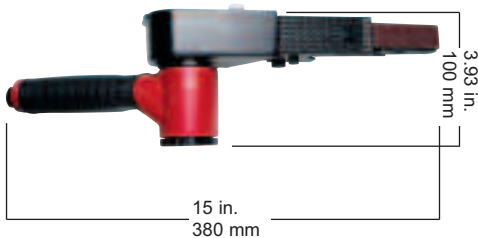


RediPower

RP9779



RP9780



	RP9779	RP9780
N°	6151939779	6151939780
 Belt Size	0.4x13 in. 10x330 mm	0.9x20.4 in. 20x520 mm
 Free Speed	22000 rpm tr/min min-1 giri/min	20000 rpm tr/min min-1 giri/min
 Tool Weight	1.98 lb 0.9 kg	3.3 lb 1.5 kg
 Tool Length	12 in. 305 mm	15 in. 380 mm
 Air Consumption	28 cfm 13.3 l/s	30 cfm 14.6 l/s
 Min. Int. Hose Ø	3/8 in. 10 mm	3/8 in. 10 mm
 Air Inlet	1/4" NPT	1/4" NPT
 Vibration	<2.5 m/s ²	<2.5 m/s ²
 Sound Level	90.5 dB(A)	90.5 dB(A)

Accessories

Belts	Grit	Qty	RP9779 10 x 330 mm	RP9780 20 x 520 mm
				60
	80	5	2050504453	2050504493
	100	5	2050504463	2050504503
	120	5	2050504473	2050504513

▶ BELT SANDER

Grinding head pivots 180°
Arm locks in place for easy abrasives change
Swivel air inlet

▶ PONCEUSE À BANDE

Bras tendeur orientable sur 180°
Blocage du bras tendeur pour un changement aisé des bandes abrasives
Raccord d'admission rotatif

▶ BANDSCHLEIFER

Schleifarm 180° schwenkbar
Einfacher Schleifbandwechsel
Durch Arretierung drehbarer Lufteinlaß

▶ LIJADORA DE BANDA

Cabezal de lijado con giro de 180°
Brazo con bloqueo para el fácil montaje de los abrasivos
Entrada de aire giratoria

▶ LEVIGATRICE A NASTRO

Testa regolabile di 180°
Blocco del braccio per facilitare il cambio dei nastri
Innesto aria snodato

▶ LIXADEIRA DE CINTA

Cabeçote de lixamento articulável 180°
Bloqueio do braço para fácil troca do abrasivo
Entrada de ar giratória

▶ ЛЕНТОЧНАЯ ШЛИФМАШИНКА

Шлифовальная головка поворачивается на 180°
Блокировка плеча для легкой смены абразивов
Поворотный штуцер впуска воздуха

▶ 砂带磨

研磨头枢轴 180°
轴臂锁紧装置易于更换砂带
进气嘴可旋转方向