



# Industrial <sup>Tools</sup>

The Ultimate  
Power Tools



## ***REDIPOWER***

The New Generation of Power Tools



**Industrial**<sup>Tools</sup>

# *RediPower*

## The new generation of Industrial

CP is proud to announce the new expanded line of heavy-duty industrial power tools. Understanding your needs and improving your productivity are key to our product development process. Our innovative product development centres strive to ensure that we can offer the right tool for your applications.

**Through a combination of durability, reliability and 'fit for purpose' products the RediPower line of tools represent excellent value for money.**

All CP tools are designed and manufactured to the standards you expect from a quality power tool manufacturer. Irrespective of your requirements for power tool performance & productivity CP are able to offer tools to suit every need whether they are used for intensive industrial production, general production or intermittent use.

At CP we understand that you have a choice of power tool supply and we aim to provide you with the information and options necessary to allow you make the correct choice for your production environment.

Furthermore, our own personnel are available regionally and internationally to provide local services. Our comprehensive sales and distribution network ensure that help and advice are always available.



All Redipower tools are designed and developed by CP's Research and Development department.

# Industrial Power Tools



## Which tools best suit your needs?

Application	Industrial Tools	RediPower Tools
High Productivity	★★★★	★
General Productivity	★★★★	★★
Light Productivity	★★★★	★★★★
Maintenance & Repair Operations	★★★★	★★★★
2000 hours Service Interval	★★★★	★
500 hours Service Interval	★★★★	★★★★
Advanced Ergonomics	★★★★	★★

★★★★: Ultimate

★★ : Good

★ : Not Suitable

For more information concerning our Industrial Tools please ask for publication XXXXX.

## Content

**Impact wrenches**  
pages 4 to 8



**Ratchet wrenches**  
page 9



**Screwdrivers**  
pages 10 to 12



**Sanders**  
page 13



**Grinders**  
pages 14 to 15



**Hammers, Chippers, Scalers, Saws, Engraving pen**  
pages 16 to 17





**Drills**  
pages 18 to 20



**Accessories**  
page 21

# IMPACT WRENCHES - 3/8" DRIVE




**RP9521**

Taille 1 des shoots photos

**FEATURES**

- ⌚Rocking Dog clutch
- ⌚Built in power regulator
- ⌚Ergonomic grip

**ADVANTAGES**


- ⌚Good for very soft joints
- ⌚Quick torque adjustment
- ⌚Operator comfort


**BENEFITS**

- ⌚Fast cycle time
- ⌚Improved quality
- ⌚Improved productivity

Noise level: 84 dB(A) - Sound Power: 95 dB(A) - Vibration: 4.9 m/s<sup>2</sup>      Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9521	6151909521	3/8	Friction Ring	6.8-70	5-50	122	90	4.7	10	146	5.75	1.2	1.6




**RP9522**

**FEATURES**

- ⌚Rocking Dog clutch
- ⌚Butterfly start / reverse valve
- ⌚360° air inlet swivel connector

**ADVANTAGES**


- ⌚Good for very soft joints
- ⌚Quick direction change
- ⌚Operator comfort


**BENEFITS**

- ⌚Fast cycle time
- ⌚Versatility
- ⌚Improved productivity

Noise level: 86 dB(A) - Sound Power: 97 dB(A) - Vibration: 2.6 m/s<sup>2</sup>      Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9522	6151909522	3/8	Friction Ring	6.8-70	5-50	122	90	4.7	10	146	5.75	0.9	2.0




**RP9524**

**FEATURES**

- ⌚Dyna Pact™ clutch
- ⌚Through handle air exhaust
- ⌚Compact & Ergonomic

**ADVANTAGES**


- ⌚High torque in small package
- ⌚Exhaust directed away from work piece
- ⌚Easy to handle tool


**BENEFITS**

- ⌚Versatility
- ⌚Operator comfort
- ⌚Improved productivity

Noise level: 94 dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s<sup>2</sup>      Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9524	6151909524	3/8	Friction Ring	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1




**RP9525**

**FEATURES**

- ⌚all per RP9524
- ⌚Pin type socket retainer

**ADVANTAGES**

- ⌚all per RP9524
- ⌚Positive socket retention

**BENEFITS**

- ⌚all per RP9524
- ⌚Security

Noise level: 94 dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s<sup>2</sup>      Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9525	6151909525	3/8	Pin	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1

## IMPACT WRENCHES - 1/2" DRIVE



### RP9526



#### FEATURES

- all per RP9524
- Compact Tool with 1/2" square drive
- Friction ring socket retention

#### ADVANTAGES

- all per RP9524
- Wide range of socket sizes available
- Quick change socket capability

#### BENEFITS

- all per RP9524
- Flexibility
- Flexibility

Noise level: 94 dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s<sup>2</sup> Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9526	6151909526	1/2	Friction ring	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1



### RP9527



#### FEATURES

- all per RP9524
- Compact Tool with 1/2" square drive
- Pin type socket retainer

#### ADVANTAGES

- all per RP9524
- Wide range of socket sizes available
- Positive socket retention

#### BENEFITS

- all per RP9524
- Flexibility
- Security

Noise level: 94 dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s<sup>2</sup> Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9527	6151909527	1/2	Pin	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1



### RP9540



#### FEATURES

- Dyna Pact™ clutch
- Through handle air exhaust
- Compact & Ergonomic

#### ADVANTAGES

- High torque in small package
- Exhaust directed away from work piece
- High torque to size package

#### BENEFITS

- Versatility
- Operator comfort
- Improved productivity

Noise level: 94 dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s<sup>2</sup> Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9540	6151909540	1/2	Friction ring	34-420	25-310	576	425	7.1	15	191	7.5	2.3	5.1



### RP9541



#### FEATURES

- Steel clutch housing
- Pin clutch in oil bath
- 3-piece construction

#### ADVANTAGES

- Withstands rough use
- Ideal for fast rundown with high torque
- Ease of maintenance


#### BENEFITS

- Durability
- Durability & productivity
- Productivity


Noise level 89 dB(A) - Sound Power: 100 dB(A) - Vibration: 2.7 m/s<sup>2</sup> Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9541	6151909541	1/2	Friction ring	27-245	20-180	374	275	6.6	14	168	6.6	2.5	5.5

## IMPACT WRENCHES - 1/2" DRIVE



# RP9542



## FEATURES

- all per RP9541
- Pin type socket retainer

## ADVANTAGES

- all per RP9541
- Positive socket retention


## BENEFITS

- all per RP9541
- Security


Noise level 89 dB(A) - Sound Power: 100 dB(A) - Vibration: 2.7 m/s<sup>2</sup>

Air inlet: 1/4" NPTF

MODEL		PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9542		6151909542	1/2	Pin	27-245	20-180	374	275	6.6.	14	168	6.6	2.5	5.5



RP9543



FEATURES

all per RP9541

Quick change chuck

ADVANTAGES

all per RP9541

Ideal for multiple applications

BENEFITS


all per RP9541

Flexibility & productivity


Noise level 89 dB(A) - Sound Power: 100 dB(A) - Vibration: 2.7 m/s<sup>2</sup>

Air inlet: 1/4" NPTF

MODEL		PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9543		6151909543	7/16 hex	Quick change	27-245	20-180	374	275	6.6	14	199	7.8	2.6	5.8



# RP9545



## FEATURES

- New SpringHammer™ clutch
- High reverse torque
- New grip and trigger design

## ADVANTAGES

- High durability
- Ideal for rework operations
- Operator comfort

## BENEFITS


- Longer life
- Flexibility & productivity
- Productivity

Noise level 96 dB(A) - Sound Power: 107 dB(A) - Vibration: 4 m/s<sup>2</sup>

Air inlet: 1/4" NPTF

MODEL		PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9545		6151909545	1/2	Friction ring	25-310	34-420	746	550	9	19	180	7.1	2.5	5.6



## 1/2" IMPACT WRENCH with SOCKET KIT



RP9550 & RP9552		FEATURES		ADVANTAGES				BENEFITS					
		⌚all per RP9540		⌚all per RP9540				⌚all per RP9540					
		⌚Tool carry case with socket set		⌚Portability of tool and sockets				⌚Time saving convenience					
Noise level: 94dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s²      Air inlet: 1/4" NPTF													
MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9550	6151909550	1/2	Friction ring	34-420	25-310	576	425	7.1	15	191	7.5	2.3	5.1
RP9552	6151909552	1/2	Friction ring	34-420	25-310	576	425	7.1	15	191	7.5	2.3	5.1
RP9550 : Sockets 1/2", 5/8", 3/4", 7/8", 15/16" A/F													
RP9552 : Sockets 14, 16, 17, 19 & 22mm A/F													



## IMPACT WRENCHES - 3/4" DRIVE

	RP9547	FEATURES	ADVANTAGES	BENEFITS
		➔Jumbo Dog clutch	➔Good for soft & hard joints	➔Versatility
		➔Steel clutch housing	➔Withstands rough use	➔Durability
		➔Ergonomic grip	➔Operator comfort	➔Improved productivity

Noise level: 97 dB(A) - Sound Power: 108 dB(A) - Vibration: 8 m/s<sup>2</sup>

Air Inlet: 3/8" NPTF



MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9547	6151909547	3/4	Hole	135-810	100-600	1285	950	18.4	39	226	8.9	5.75	12.6

	RP9549	FEATURES	ADVANTAGES	BENEFITS
		➔all per RP9547	➔all per RP9547	➔all per RP9547
		➔Friction ring socket retention	➔Quick change socket capability	➔Flexibility

Noise level: 97 dB(A) - Sound Power: 108 dB(A) - Vibration: 8 m/s<sup>2</sup>

Air Inlet: 3/8" NPTF



MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9549	6151909549	3/4	Friction Ring	135-810	100-600	1285	950	18.4	39	226	8.9	5.75	12.6

	RP9560	FEATURES	ADVANTAGES	BENEFITS
		➔Pin clutch	➔Good for hard joints	➔Durability
		➔High power to weight ratio	➔Operator Comfort	➔Improved productivity
		➔Ergonomic grip	➔Operator comfort	➔Improved productivity

Noise level: 99 dB(A) - Sound Power: 110 dB(A) - Vibration: 4.9 m/s<sup>2</sup>

Air Inlet: 3/8" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9560	6151909560	3/4	Friction Ring	200-950	150-700	1360	1000	11.3	24	244	9.6	4.8	10.5

	RP9561	FEATURES	ADVANTAGES	BENEFITS
		➔Steel clutch housing	➔Withstands rough use	➔Durability
		➔Pin clutch in oil bath	➔Ideal for fast rundown with high torque	➔Durability & productivity
		➔3-piece construction	➔Ease of maintenance	➔Productivity

Noise level: 100 dB(A) - Sound Power: 111 dB(A) - Vibration: 5.1 m/s<sup>2</sup>

Air Inlet: 3/8" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9561	6151909561	3/4	Hole	102-680	75-500	1020	750	14.1	30	216	8.5	4.8	10.5

## 3/4" IMPACT WRENCH with SOCKET KIT

	RP9551 & RP9553	FEATURES	ADVANTAGES	BENEFITS
		➔all per RP9560	➔all per RP9560	➔all per RP9560
		➔Tool carry case with socket set	➔Portability of tool and sockets	➔Time saving convenience

Noise level: 99dB(A) - Sound Power: 110 dB(A) - Vibration: 4.9 m/s<sup>2</sup>


Air Inlet: 3/8" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9551	6151909551	3/4	Friction Ring	200-950	150-700	1360	1000	11.3	24	244	9.6	4.8	10.5
RP9553	6151909553	3/4	Friction Ring	200-950	150-700	1360	1000	11.3	24	244	9.6	4.8	10.5

RP9551 : Sockets 15/16", 1", 1 1/16", 1 1/8" A/F

RP9553 : Sockets 24, 27, 30, 32 mm A/F

## IMPACT WRENCHES - 1" DRIVE



**RP9548**

**FEATURES**

- all per RP9547
- Compact Tool with 1" square drive

**ADVANTAGES**


- all per RP9547
- Large socket sizes available

**BENEFITS**

- all per RP9547
- Flexibility

Noise level: 97dB(A) - Sound Power: 108dB(A) - Vibration: 8 m/s<sup>2</sup>      Air Inlet: 3/8" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9548	6151909548	1	Hole	135-810	100-600	1285	950	18.4	39	226	8.9	5.75	12.6



**RP9582**

**FEATURES**

- Rocking Dog clutch
- Progressive tease throttle
- Trigger located inside grip

**ADVANTAGES**


- Ideal for soft pull up & prevailing torque joints
- Allows slow start for ease of bolt starting
- easy of handing

**BENEFITS**

- Fast cycle time
- Improved quality
- operator comfort

Noise level: 110 dB(A) - Sound Power: 121 dB(A) - Vibration: 4.3 m/s<sup>2</sup>      Air Inlet: 1/2" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9582	6151909582	1	Friction ring/Hc	200-1225	150-900	1900	1400	18.9	40	394	15.5	12.3	27.0



**RP9583**

**FEATURES**

- all per RP9582
- 6" extended anvil

**ADVANTAGES**


- all per RP9582
- Enables operation in confined access areas

**BENEFITS**

- all per RP9582
- Versatility

Noise level: 110 dB(A) - Sound Power: 121 dB(A) - Vibration: 4.3 m/s<sup>2</sup>      Air Inlet: 1/2" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9583	6151909583	1	Friction ring	200-1225	150-900	1900	1400	18.9	40	564	22.2	13.5	29.8



**RP9597**

**FEATURES**

- Steel clutch housing
- 2 Jaw clutch in oil bath
- 3-piece construction

**ADVANTAGES**

- Withstands rough use
- Good for both soft & hard joint applications
- Ease of maintenance

**BENEFITS**

- Durability
- Durability & productivity
- Productivity

Noise level: 101 dB(A) - Sound Power: 112 dB(A) - Vibration: 13 m/s<sup>2</sup>      Air Inlet: 1/2" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in		Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9597	6151909597	1	Hole	380-2450	280-1800	3790	2800	22.7	48	241	9.5	9.1	20



## RATCHET WRENCHES



### RP9425

#### FEATURES

- Compact 1/4" square drive ratchet wrench
- Easy change reverse mechanism
- Progressive tease throttle

#### ADVANTAGES

- Ideal for tight access applications
- Quick direction change
- Variable speed & torque output

#### BENEFITS

- Versatility
- Flexibility
- Accommodates various applications



Noise level: 87 dB(A) - Sound Power: 98 dB(A) - Vibration: 6.2 m/s<sup>2</sup> Air Inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				MIN.		MAX.							
		in	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9425	6151919425	1/4	200	7	5	20	15	4.7	10	165	6.5	0.85	1.9



### RP9429

#### FEATURES

- High Power with 3/8" square drive
- Full torque in reverse

#### ADVANTAGES

- High torque in small package
- Ideal for disassembly operations

#### BENEFITS

- Versatility
- Flexibility



Noise level: 97 dB(A) - Sound Power: 108 dB(A) - Vibration: 7.9 m/s<sup>2</sup> Air Inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				MIN.		MAX.							
		in	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9429	6151919429	3/8	150	14	10	68	50	7.5	16	254	10	1.2	2.6



### RP9430

#### FEATURES

- all per RP9429
- 1/2" square drive

#### ADVANTAGES

- all per RP9429
- accommodates larger socket range

#### BENEFITS

- all per RP9429
- Flexibility



Noise level: 97 dB(A) - Sound Power: 108 dB(A) - Vibration: 7.9 m/s<sup>2</sup> Air Inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				MIN.		MAX.							
		in	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9430	6151919430	1/2	150	14	10	68	50	7.5	16	254	10	1.2	2.6



### RP9431

#### FEATURES

- High Torque capability
- Full torque in reverse
- Lightweight with composite grip

#### ADVANTAGES

- Ideal for larger fasteners
- Ideal for disassembly operations
- Operator comfort

#### BENEFITS

- Versatility
- Flexibility
- Improved productivity



Noise level: 97dB(A) - Sound Power: 108 dB(A) - Vibration: 14.8 m/s<sup>2</sup> Air Inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				MIN.		MAX.							
		in	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9431	6151919431	3/8	190	14	10	122	90	18.5	39	305	12	1.2	2.7



### RP9432

#### FEATURES

- all per RP9431
- 1/2" square drive

#### ADVANTAGES

- all per RP9431
- accommodates larger socket range

#### BENEFITS


- all per RP9431
- Flexibility



Noise level: 97dB(A) - Sound Power: 108 dB(A) - Vibration: 14.8 m/s<sup>2</sup> Air Inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				MIN.		MAX.							
		in	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in	kg	lb
RP9432	6151919432	1/2	190	14	10	122	90	18.5	39	305	12	1.2	2.7

## SCREWDRIVERS



RP2754

FEATURES

Direct drive reversible screwdriver

High speed

Ergonomic grip pistol drill

ADVANTAGES

Suitable for variable torque application

Fast screw rundown


Operator comfort

BENEFITS

Ideal for self drilling screw fas

Productivity

Improved productivity




Noise level: 77 dB(A) - Vibration: <2.5 m/s<sup>2</sup>

Air Inlet: 1/4" BSP/NPT

MODEL		PART NUMBER	FREE SPEED	TORQUE RANGE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT			
			rpm	Nm	in lb	Nm	in lb	l/s	cfm	mm	in	kg	lb
RP2754	6151922754		1450	-	-	5.0	44	8	17	210	8.3	0.9	2.0





RP2764

FEATURES

Direct drive reversible screwdriver

Slow speed

Ergonomic grip pistol drill

ADVANTAGES

Suitable for variable torque application

High torque


Operator comfort

BENEFITS

Ideal for self drilling screw fasteners

Ideal for larger screw sizes

Improved productivity




Noise level: 77 dB(A) - Vibration: <2.5 m/s<sup>2</sup>

Air Inlet: 1/4" BSP/NPT

MODEL		PART NUMBER	FREE SPEED	TORQUE RANGE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT			
			rpm	Nm	in lb	Nm	in lb	l/s	cfm	mm	in	kg	lb
RP2764		6151922764	600	-	-	14	124	8	17	228	9	1.0	2.2





RP2003

FEATURES

Push to start operation

Shut off clutch

Quick change reverse operation

ADVANTAGES

Ideal for contiuous operation

Positive shut off at preset torque

Reduces time during rework

BENEFITS


Prodcutivity

Improved qualtiy

Improved productivity


Noise level: 73 dB(A) - Vibration: <2.5 m/s²

Air Inlet: 1/8" BSP



MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT			
		rpm	Nm	in lb	Nm	in lb	l/s	cfm	mm	in	kg	lb
RP2003	6151922003	1100	0,4	3,5	1,5	13	4,1	9	197	7,7	0,4	0,92





RP2007

FEATURES

ADVANTAGES


BENEFITS

All the great features of RP2003 with the added advantage of higher torque output for larger screw fastening

Shut off clutch

Positive shut off at preset torque

Improved quality



Noise level: 81 dB(A) - Vibration: < 2.5 m/s²


Air Inlet: 1/8" BSP

MODEL		PART NUMBER	FREE SPEED	TORQUE RANGE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT			
			rpm	Nm	in lb	Nm	in lb	l/s	cfm	mm	in	kg	lb
RP2007		6151922007	1100	0,4	3,5	4,3	38	6,5	14	250	9,8	0,6	1,3





## SCREWDRIVERS

	RP2015	FEATURES	ADVANTAGES	BENEFITS
		Ergonomic formed grip	Operator comfort	Improved productivity
		High speed	Fast screw fastening	Improved productivity
		Shut off clutch	Positive shut off at preset torque	Improved quality



Noise level: 81 dB(A) - Vibration: < 2.5m/s<sup>2</sup>

Air Inlet: 1/4" BSP

MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	Nm	in lb	Nm	in lb	l/s	cfm	mm	in	kg	lb
RP2015	6151922015	1470	2,0	18	5,5	49	9	20	220	8,7	1	2,2

	RP2009	FEATURES	ADVANTAGES	BENEFITS
		Similar features to RP2008		
		Roller clutch	Ideal for multiple applications	Flexibility



Noise level: 77dB(A) - Vibration: 9 - 35 m/s<sup>2</sup>

Air Inlet: 1/8" BSP

MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	Nm	in lb	Nm	in lb	l/s	cfm	mm	in	kg	lb
RP2009	6151922009	1100	0,4	3,5	4,4	39	6,5	14	250	9,8	0,6	1,3

	RP2011	FEATURES	ADVANTAGES	BENEFITS
		Similar features to RP2012		
		Roller clutch combined with high speed	Ideal for multiple applications	Flexibility



Noise level: 73 dB(A) - Vibration: 16.1 m/s<sup>2</sup>

Air Inlet: 1/4" BSP

MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	Nm	in lb	Nm	in lb	l/s	cfm	mm	in	kg	lb
RP2011	6151922011	1470	2,0	18	5,5	49	9	20	278	10,9	0,9	2

	RP2006	FEATURES	ADVANTAGES	BENEFITS
		Similar features to RP2009 in a pistol grip format		



Noise level: 75 dB(A) - Vibration: 2.3 - 3.9 m/s<sup>2</sup>

Air Inlet: 1/8" BSP

MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	Nm	in lb	Nm	in lb	l/s	cfm	mm	in	kg	lb
RP2006	6151922006	1100	0,4	3,5	4,4	39	6,5	14	182	7,2	0,8	1,8

	RP2014	FEATURES	ADVANTAGES	BENEFITS
		Similar features to RP2011 in a pistol grip format		




Noise level: 81 dB(A) - Vibration: 3.2 m/s<sup>2</sup>

Air Inlet: 1/4" BSP

MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	Nm	in lb	Nm	in lb	l/s	cfm	mm	in	kg	lb
RP2014	6151922014	1470	2,0	18	5,5	49	9	20	220	8,7	1	2,2

## SANDERS

	RP9534 & RP9674	FEATURES	ADVANTAGES	BENEFITS
		4-in-1 modular sander High quality 'hook-it' sanding pad 5 and 10mm random orbit	Can be configure to suit application/operator Long lasting Ideal for fast stock removal	Flexibility Improved productivity Improved productivity



Noise level: 83 dB(A) - Vibration: <2.5 m/s<sup>2</sup>

Air Inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	PAD SIZE		SPINDLE THREAD	FREE SPEED	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		mm	in.		rpm	l/s	cfm	mm	in	kg	lb
5 mm random orbit	RP9534	6151939534	150	6	5/16"-24f	9000	8.97	19	190	7.5	1.3 2.9
10 mm random orbit	RP9674	6151939674	150	6	5/16"-24f	9000	8.97	19	190	7.5	1.3 2.9


	RP9164	FEATURES	ADVANTAGES	BENEFITS
		General duty sander Rotary & orbital option	Ideal for multiple applications Fine finishing & rapid stock removal	Flexibility Versatility



Noise level: 90 dB(A) - Sound Power : 101 dB(A) - Vibration: 7.3 m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	PAD SIZE		SPINDLE THREAD	FREE SPEED	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		mm	in.		rpm	l/s	cfm	mm	in	kg	lb
RP9164	6151939164	152	6	5/16"-24f	9600	8,8	18	222	8.75	1,7	3.8


	RP9776	FEATURES	ADVANTAGES	BENEFITS
		Mini rotary sander Adjustable speed regulator Through handle exhaust	Ideal for small area work Match the speed to the job Directs exhaust air away from operator/workpiece	Ease of use Improved productivity Operator comfort



Noise level: 77 dB(A) - Vibration: < 2.5m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	PAD SIZE		SPINDLE THREAD	FREE SPEED	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		mm	in.		rpm	l/s	cfm	mm	in	kg	lb
RP9776	6151939776	76	3	3/8" x 24	14000	8,9	19	121	4.7	0,7	1.5

	RP9778	FEATURES	ADVANTAGES	BENEFITS
		High speed sander Variable speed throttle Lightweight	Ideal for tight access work Match the speed to the application Ease of handling	Flexibility Improved productivity Operator comfort



Noise level: 90 dB(A) - Sound Power: 101 dB(A) - Vibration: < 2.5m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	PAD SIZE		SPINDLE THREAD	FREE SPEED	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		mm	in.		rpm	l/s	cfm	mm	in	kg	lb
RP9778	6151939778	127	5	7/16" - 20	16000	12	26	203	8	1.0	2.3

## GRINDERS



### RP9104

ATTention image



### FEATURES

Compact Pencil Grinder  
Good power to size ratio

### ADVANTAGES

Good manoeuvrability  
Lightweight

### BENEFITS

Ideal for intricate work  
Operator comfort

Noise level: 74 dB(A) - Vibration: 8.3 m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp	rpm	mm	in	l/s	cfm	mm	in	kg	lb
RP9104	6151959104	0,04	0,054	60000	3	1/8	3,5	7	133	5.2	0,2	0.5



### RP9105



### FEATURES

Composite body overmould  
Variable speed regulator  
Rear exhaust

### ADVANTAGES

Ergonomic grip  
Optimum speed selection  
Directs exhaust away from the operator & workpie

### BENEFITS

Operator Comfort  
Productivity  
Operator Comfort

Noise level: 84 dB(A) - Vibration: 6.8 m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp	rpm	mm	in	l/s	cfm	mm	in	kg	lb
RP9105	6151959105	0,18	0,25	30000	6	1/4	9	19	155	6.1	0,6	1.2



### RP9106



### FEATURES

Composite body overmould  
Variable speed regulator  
Rear exhaust

### ADVANTAGES

Ergonomic grip  
Optimum speed selection  
Directs exhaust away from the operator & workpie

### BENEFITS

Operator Comfort  
Productivity  
Operator Comfort

Noise level: 84 dB(A) - Vibration: 3.6m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp	rpm	mm	in	l/s	cfm	mm	in	kg	lb
RP9106	6151959106	0,18	0,25	24000	6	1/4	9	19	159	6.2	0,6	1.2



### RP9107



### FEATURES

Pistol grip  
Adjustable speed regulator  
Through handle exhaust

### ADVANTAGES

Ideal for small horizontal application  
Match the speed to the job  
Directs exhaust air away from operator/workpie

### BENEFITS

Operator comfort  
Improved productivity  
Operator comfort

Noise level: 81 dB(A) - Vibration: < 2.5m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp	rpm	mm	in	l/s	cfm	mm	in	kg	lb
RP9107	6151959107	0,15	0,2	17000	6	1/4	8,5	16	120	4.7	0,7	1.5



## GRINDERS



### RP9108

#### FEATURES

Composite body overmould  
Variable speed regulator  
Rear exhaust

#### ADVANTAGES

Ergonomic grip  
Optimum speed selection  
Directs exhaust away from the operator & workpie Operator Comfort

#### BENEFITS

Operator Comfort  
Productivity



Noise level: 84 dB(A) - Vibration: 4.4m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp	rpm	mm	in	l/s	cfm	mm	in	kg	lb
RP9108	6151959108	0,18	0,25	23000	6	1/4	9	19	193	7.6	0.6	1.2



### RP9110

#### FEATURES

All the features & benefits of RP9105  
Extended spindle

#### ADVANTAGES

Ideal when longer reach is required

#### BENEFITS

Versatility



Noise level: 84 dB(A) - Vibration: 4.0 m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp	rpm	mm	in	l/s	cfm	mm	in	kg	lb
RP9110	6151959110	0,18	0,25	30000	6	1/4	9	19	250	9.9	0,9	1.9



### RP9120

#### FEATURES

Powerful motor  
Alloy body  
Side handle supplied

#### ADVANTAGES

High performance  
Lightweight durability  
Easier handling

#### BENEFITS

Productivity  
Operator comfort  
Improved operator control



Noise level: 84 dB(A) - Vibration: 7.5m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED	WHEEL SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp	rpm	mm	in	l/s	cfm	mm	in	kg	lb
RP9120	6151959120	0,5	0,68	14000	102	4	10	21	229	9	1,8	4



### RP9121

#### FEATURES

All the feature and benefits of RP9120 in a 5" (127mm) wheel format

#### ADVANTAGES

#### BENEFITS




Noise level: 84 dB(A) - Vibration: 8.1m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED	WHEEL SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp	rpm	mm	in	l/s	cfm	mm	in	kg	lb
RP9121	6151959121	0,5	0,68	12000	127	5	10	21	229	9	1,9	4.2

# HAMMERS / CHIPPERS / SCALERS / SAWS / ENGRAVING PEN



RP9536

FEATURES

Air Hammer with Composite body  
 Unique vibration damping  
 Tease throttle

ADVANTAGES


Comfort  
 Less operator reaction  
 Slow start up

BENEFITS

Productivity  
 Improved operator comfort  
 Improved control

Noise level: 97 dB(A) - Sound level: 108 dB(A) - Vibration: 5.9 m/s<sup>2</sup>
 Air Inlet: 1/4" NPT

MODEL	PART NUMBER	COLD RIVET CAPACITY DURAL		COLD RIVET CAPACITY STEEL		BORE AND STROKE		BLOWS PER MINUTE	CHISEL RIVET SET SHANK	AIR CONS		OVERALL LENGTH		NET WEIGHT	
		mm	in	mm	in	mm	in		in	l/s	cfm	mm	in	kg	lb
RP9536	6151969536	6.4	1/4	4.8	3/16	19x 67	3/4x2 <sup>5/8</sup>	3200	0,401	7	14	230	9	1,7	3.7



RP9537

FEATURES


All the features and benefits of RP9536 with more power

ADVANTAGES

BENEFITS

Noise level: 95 dB(A) - Sound level: 106 dB(A) - Vibration: 4.2 m/s<sup>2</sup>
 Air Inlet: 1/4" NPT

MODEL	PART NUMBER	COLD RIVET CAPACITY DURAL		COLD RIVET CAPACITY STEEL		BORE AND STROKE		BLOWS PER MINUTE	CHISEL RIVET SET SHANK	AIR CONS		OVERALL LENGTH		NET WEIGHT	
		mm	in	mm	in	mm	in		in	l/s	cfm	mm	in	kg	lb
RP9537	6151969537	7.9	5/16	6.4	1/4	19 x 90	3/4x3 1/2	2200	0,401	8	17	280	11	2,1	4.6



RP9311

FEATURES

Air Hammer with Aluminium body  
 Powerful

ADVANTAGES


Durable  
 Fast action

BENEFITS

Withstands tough use  
 Productivity

Noise level: 100 dB(A) - Sound level: 111 dB(A) - Vibration: 8.9 m/s<sup>2</sup>
 Air Inlet: 1/4" NPT

MODEL	PART NUMBER	COLD RIVET CAPACITY DURAL		COLD RIVET CAPACITY STEEL		BORE AND STROKE		BLOWS PER MINUTE	CHISEL RIVET SET SHANK	AIR CONS		OVERALL LENGTH		NET WEIGHT	
		mm	in	mm	in	mm	in		in	l/s	cfm	mm	in	kg	lb
RP9311	6151969311	6.4	1/4	4.8	3/16	19x67	3/4x2 <sup>5/8</sup>	3000	.401	11,8	25	171	6.7	1.6	3.5



RP9315

FEATURES

All the features and benefits of RP9311 with more power

ADVANTAGES

BENEFITS

Noise level: 100 dB(A) - Sound level: 111 dB(A) - Vibration: 9.4 m/s<sup>2</sup>
 Air Inlet: 1/4" NPT

MODEL	PART NUMBER	COLD RIVET CAPACITY DURAL		COLD RIVET CAPACITY STEEL		BORE AND STROKE		BLOWS PER MINUTE	CHISEL RIVET SET SHANK	AIR CONS		OVERALL LENGTH		NET WEIGHT	
		mm	in	mm	in	mm	in		in	l/s	cfm	mm	in	kg	lb
RP9315	6151969315	7.9	5/16	6.4	1/4	19x89	3/4x3 1/2	2300	.401	11,8	25	225	8.9	1,9	4.2

## HAMMERS / CHIPPERS / SCALERS / SAWS / ENGRAVING PEN



**RP9881**

### FEATURES

Heavy duty reciprocating saw  
Universal saw blade holder  
Lock off lever throttle

### ADVANTAGES

Accepts standard saw blades  
Reduces the risk of inadvertent starting

### BENEFITS

Economical  
Improved safety



Noise level: 81 dB(A) - Vibration: < 2.5m/s<sup>2</sup>

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	STROKE LENGTH						BLOWS PER MINUTE			AIR CONS		OVERALL LENGTH		NET WEIGHT	
		mm	in								l/s	cfm	mm	in	kg	lb
RP9881	6151979881	25	1					5000			13	27	268	10.5	1	2.1



**RP9160**

### FEATURES

Compact engraving pen  
Finger tip start valve

### ADVANTAGES

Enhanced control

### BENEFITS

Improved quality marking



Noise level: 59 dB(A) - Vibration: < 2.5m/s<sup>2</sup>

Air Inlet : 1/4" BSP

MODEL	PART NUMBER	FREQUENCY							AIR CONS		OVERALL LENGTH		NET WEIGHT	
		Hz							l/s	cfm	mm	in	kg	lb
RP9160	6151979160	540							0,8	1,69	147	5.8	0,123	0.25

## DRILLS



### RP1064

#### FEATURES

- Compact slimline design pistol drill
- 10mm chuck fitted as standard
- 0.3 HP (230W) @ 2500 rpm

#### ADVANTAGES

- Ideal for close quarter drilling
- Accomodates wide range of drill bit sizes
- Good power & speed for general drilling

#### BENEFITS

- Versatility and flexibility
- One tool - many applications
- Productivity



Noise level: 83 dB(A) - Vibration: <2.5 m/s<sup>2</sup>

Air Inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP1064	6151941064	2500	0.23	0.30	10	3/8	3/8"-24f	9.3	19.7	225	8.9	0.7	1.5



### RP1454

#### FEATURES

- Compact slimline design pistol drill
- 10mm chuck fitted as standard
- 0.3 HP (230W) @ 4300 rpm

#### ADVANTAGES

- Ideal for close quarter drilling
- Accomodates wide range of drill bit sizes
- Good power & speed for drilling & polishing

#### BENEFITS

- Versatility and flexibility
- One tool - many applications
- Productivity



Noise level: 83 dB(A) - Vibration: <2.5 m/s<sup>2</sup>

Air Inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP1454	6151941454	4300	0.23	0.30	10	3/8	3/8"-24f	9.3	19.7	225	8.9	0.7	1.5



### RP1664

#### FEATURES

- Reversible
- Compact slimline design pistol drill
- Sliding reverse valve

#### ADVANTAGES

- Can be used for drilling & screwdriving
- Ideal for close quarter drilling
- Quick change for forward / reverse

#### BENEFITS

- One tool - two functions
- Versatility and flexibility
- Productivity



Noise level: 83 dB(A) - Vibration: <2.5 m/s<sup>2</sup>

Air Inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP1664	6151941664	2000	0.19	0.26	10	3/8	3/8"-24f	9.3	19.7	225	8.9	0.7	1.5



### RP1264

#### FEATURES

- Ergonomic grip pistol drill
- 10mm chuck fitted as standard
- 0.38 HP (280W) @ 2900 rpm

#### ADVANTAGES

- Operator comfort
- Accomodates wide range of drill bit sizes
- Higher power & speed improves cycle time

#### BENEFITS

- Improved productivity
- One tool - many applications
- Improved productivity




Noise level: 78 dB(A) - Vibration: <2.5 m/s<sup>2</sup>

Air Inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP1264	6151941264	2900	0.28	0.38	10	3/8	3/8"-24f	9.3	19.7	175	6.9	0.9	2.0

# DRILLS



RP1274

FEATURES

➤Ergonomic grip pistol drill

➤Keyless chuck 'quick change'

➤0.38 HP (280W) @ 2900 rpm

ADVANTAGES

➤Operator comfort

➤Quick drill bit change

➤Higher power & speed improves cycle time

BENEFITS


➤Improved productivity

➤Improved productivity

➤Improved productivity

Noise level: 78 dB(A) - Vibration: <2.5 m/s<sup>2</sup>      Air Inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP1274	6151941274	2900	0.28	0.38	10	3/8	3/8"-24f	9.3	19.7	175	6.9	0.9	2.0



RP9280

FEATURES

Compact 1/4" capacity chuck

Compact & lightweight

Progressive throttle

ADVANTAGES

Ideal for close quarter drilling

Ease of handling

Ideal for drill bit centering

BENEFITS


Productivity

Operator comfort

Improved hole quality

Noise level: 82 dB(A) - Vibration: <2.5 m/s<sup>2</sup>      Air Inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP9280	6151949280	3200	0.23	0.3	6.4	1/4	3/8"-24f	9	19	142	5.6	.6	1.3



RP9285

FEATURES

Good general speed tool

Through handle exhaust

Industrial quality chuck

ADVANTAGES

Suitable for many applications

Directs exhaust air away from operator/workpiece

Durability

BENEFITS


Cost effective

Operator comfort

Productivity

Noise level: 89 dB(A) - Sound Power: 100 dB(A) - Vibration: <2.5 m/s<sup>2</sup>      Air Inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP9285	6151949285	2900	0.38	0.50	10	3/8	3/8"-24f	10	21	165	6.5	1.1	2.9



RP9286

FEATURES

Similar features to RP9285

Large capacity chuck

Slow speed

ADVANTAGES

Accommodates larger drill bits

Ideal for large hole drilling

BENEFITS


Productive for larger holes

Drill bit life improved

Noise level: 90 dB(A) - Sound Power: 101 dB(A) - Vibration: <2.5 m/s<sup>2</sup>      Air Inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP9286	6151949286	600	0.37	0.50	13	1/2	3/8"-24f	11.5	24	177	7	1.8	4

DRILLS



RP9789

FEATURES

ADVANTAGES

BENEFITS

All the features of RP9286 with the added feature easy change of reverse rotation

Reversible

Industrial quality chuck

Ideal for drilling & screwdriving

Durability


Flexibility

Productivity

Noise level: 90 dB(A) - Sound Power 101 dB(A) - Vibration: <2.5 m/s²

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP9789	6151949789	800	0.27	0.37	13	1/2	3/8"-24f	11.5	24	177	7	1.8	4



RP9790

FEATURES

ADVANTAGES

BENEFITS

All the features of RP9285 with the added feature of easy change reverse rotation

Reversible

Industrial quality chuck

Ideal for drilling & screwdriving

Durability


Flexibility

Productivity

Noise level: 89 dB(A) - Sound Power 100 dB(A) - Vibration: <2.5 m/s²

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP9790	6151949790	2000	0.27	0.37	10	3/8	3/8"-24f	11.5	24	165	6.5	1.4	3



RP9879

FEATURES

ADVANTAGES

BENEFITS

Angle drill with compact head

Reversible

Industrial quality chuck

Ideal for tight access application

Ideal for drilling & screwdriving

Durability

Productivity


Flexibility

Productivity

Noise level: 91 dB(A) - Sound Power 102 dB(A) - Vibration: <2.5 m/s²

Air Inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP9879	6151949879	1300	0.18	0.25	10	3/8	3/8"-24f	8.5	18	200	8	.7	1.5



RP9887

FEATURES

ADVANTAGES

BENEFITS

In-Line operation

Contoured body

Industrial quality chuck

Ideal for vertical drilling

More positive grip

Durability

Operator comfort

Operator comfort

Productivity

Noise level: 88 dB(A) - Sound Power 99 dB(A) - Vibration: <2.5 m/s²


Air Inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		rpm	kw	hp	mm	in		l/s	cfm	mm	in	kg	lb
RP9887	6151949887	2800	0.30	0.5	10	3/8	3/8"-24f	12	26	215	8.5	.9	2




ACCESSORIES

Reinforced Hoses & Fittings

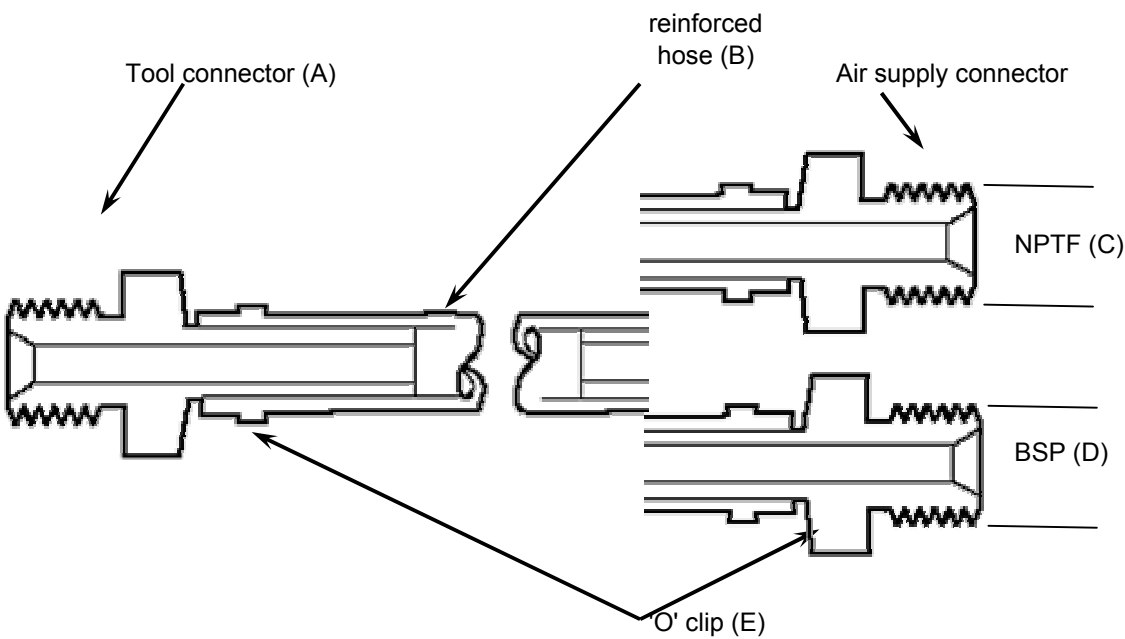

TOOL AIR INLET	HOSE	TOOL	REINFORCED	AIR SUPPLY CONNECTOR		'O' CLIP
(NPTF)	BORE	CONNECTOR (A)	HOSE (B)	(NPTF) (C)	(BSP) (D)	(2 off) (E)
		part no.	part no.	part no.	part no.	part no.
1/4"	6mm - 1/4"	615 705 0090	271403	615 705 0090	271323	271493
1/4"	10mm - 3/8"	615 705 0060	271413	615 705 0060	271333	271503
3/8"	10mm - 3/8"	615 704 0170	271413	615 704 0170		271503
3/8"	12mm - 1/2"	615 704 0270	271423	615 704 0270		271513
1/2"	12mm - 1/2"	615 704 0160	271423	615 704 0160	primer la referenc	271513

Close the lugs  
firmly with a  
pair of O-Clip  
pincers



sockets

to a picture of a few sockets

Ask your CP representative for further detail



# RediPower Safety Instructions

## General Safety Instructions for the Operation of Power Tools


The goal of Chicago Pneumatic and Desoutter is to produce tools that help the operator work safely and efficiently.

The most important safety device for this or any other tool is the operator. Care and good judgement are the best protection against injury.

All possible hazards cannot be covered here, but we have tried to highlight some of the important ones.

Individuals should look for and obey Caution, Warning and Danger signs placed on tools, and displayed in the workplace. Operators should read and follow safety instructions packed with each tool. For a copy of these instructions, contact your local Chicago Pneumatic representative.

Learn how each tool works. Even if you have previously used similar tools, carefully check out each tool before you use it. Get the 'feel' of it and know its capabilities, limitations, potential hazards, how it operates and how it stops.



### WARNING

To reduce risk of injury everyone using, installing, repairing, maintaining, changing accessories on, or working near this tool must read and understand the safety instructions before performing any such task.

All tools are designed to operate at a line pressure of 6.3 bar +/- 0.15bar in accordance with ISO2787.

Sound levels +/- 3dB(A)\* measured in accordance with EN ISO 15744

Vibration values\* measured in accordance with ISO 8662.

\*These declared values were obtained by laboratory testing in compliance with stated standards and are not adequate for risk assessments. Values measured in individual work places may be higher than the declared values. The actual exposure values and risk of harm expected by an individual are unique and depend upon the way the user works, the workplace and the work station design, as well as upon the exposure time and the physical condition of the user. We Chicago Pneumatic cannot be held liable for the consequences of using declared values, instead of values reflecting the actual exposure, in an individual risk assessment in a work place situation over which we have no control.

Tools are CE marked to comply with European Machinery Directive.

Specifications subject to change without prior notice.

Further occupational health and safety information can be obtained from the following web sites

<http://www.osha.gov> (USA)

<http://europe.osha.eu.int> (Europe).



### Compressed Air Hazards

- Air under pressure can cause injury. Never point an air hose at yourself or anyone else. Never blow your clothes free of dust with compressed air. Always direct exhaust air away from yourself and others in the work area.
- Always check for damaged or loose hoses and fittings before using an air tool, and replace if necessary. Whipping hoses can cause serious injury.
- Disconnect the tool from the air supply when not in use, before changing accessories, setting the torque, or when making repairs.
- Do not exceed rated air pressure to increase the output of the tool. This could cause injury and shorten tool life.
- Do not assemble quick coupler on the tool. Vibration can cause breakage resulting in a whipping air hose. Instead, use quick couplers on the end of a short leader hose.
- When universal twist couplings are used, lock pins must be installed to prevent accidental hose disconnection.
- Air tools are not intended for use in explosive atmospheres and are not insulated for contact with electric power sources.



### Projectile Hazards

- Always wear impact resistant eye and face protection when involved with or near the operation or repair of tools.



### Breathing Hazards

- Proper breathing protection must be worn when working with materials, which produce airborne particles.



### Noise Hazards

- Hearing loss can result from prolonged exposure to excessive sound levels.
- Use hearing protection as recommended by your employer or Occupational Health and Safety Regulations.



### Vibration Hazards

- Repetitive work motions, awkward positions, and exposure to vibration may be harmful to your hands and arms.
- If numbness, tingling, pain or whitening of the skin occurs, stop using tool and consult a physician.



### Entanglement Hazards

- To reduce the risk of injury from entanglement, do not wear loose clothing when using rotating accessories.



### Additional Hazards

- Slip/Trip/Fall is a major cause of serious injury or death. Beware of excessive hose/cord left on the walking or work surface.
- Operators and maintenance personnel must be physically fit to perform job tasks, and handle the bulk, weight and power of the tool.
- Deburring tools should be used to reduce the risk of cuts and abrasions due to burrs.
- Wear gloves to protect hands from sharp edges.

# RediPower Safety Instructions

## Specific Safety Instructions for Power Tool Groups

In addition to the General Safety Instructions, the following are safety instructions and warnings that apply to the safe operation of specific power tool groups.



### Impact Wrenches

- Never use hand sockets or accessories. Use only impact sockets and accessories in good condition. Sockets in poor condition reduce impact power and could also shatter, resulting in personal injury.
- When using a universal joint, never operate the tool off the work. It may run too fast and cause the joint to be thrown from the tool.
- Always use the simplest hook up possible. Long springy extension bars and adapters absorb impact power and could break loose resulting in personal injury. Instead, use deep sockets wherever possible.
- For tools using the pin and o-ring socket retainer, use the o-ring to securely retain the socket pin or use a one-piece retainer ring to retain socket.
- Serious injury can result from over-torqued or under-torqued fasteners, which can break, or loosen and separate. Released assemblies can become projectiles. Assemblies requiring a specific torque must be checked using a torque meter.  
**NOTE:** So-called "click" torque wrenches do not check for potentially dangerous over-torqued conditions.



### Abrasive Tools

- Never mount a grinding wheel on a sander.
- Never use a grinding wheel rated at a speed lower than the air grinder speed.
- All grinding wheels and polishing/sanding accessories should be checked for cracks or other damage before mounting and use.
- Always use the recommended wheel guard to prevent injury when performing grinding operations. If a guard has withstood wheel or disk breakage, it must be replaced.
- Position a guard between the grinding wheel or disc and the

operator. Use barriers to protect others from fragments and grinding sparks.

- Make sure grinding wheels are mounted according to manufacturer's specifications; always use correct mounting flanges.
- Before grinding, test grinding wheel by briefly running tool at full throttle. Be sure to use a barrier (such as under a heavy worktable) to protect yourself from possible broken wheel parts.
- Never tamper with or remove a speed governor from a tool to make it run faster. Periodically check tool speed with a tachometer.



### Ratchet Wrenches

- Never use hand sockets or accessories. Use only power drive sockets and accessories.
- To reduce the risk of injury, always support the handle securely in the direction opposite of the spindle rotation to minimize torque reaction.



### Drills

- Keep away from rotating bit and chuck. You can become cut or burned if you come in contact with the drill bit, chips/swarf or work surface.
- Use intermittent drill pressure to avoid long shaved chips/swarf.
- The drill bit can suddenly bind and cause the work piece or tool to rotate causing arm and shoulder injuries.
- It is recommended that side handles are used for operator comfort and safety on high torque drilling applications above 3 lbft (4Nm) on straight case tools and 7.4lbft (10Nm) on pistol grip drills. Drills with a chuck capacity larger than 3/8" (10mm) should always be used with a side handle.



### Hammers

- All chisels, rivet sets and other associated accessories should be checked for cracks, excessive wear,

or other physical damage before each use. Accessories that show signs of damage should be replaced immediately.

- Never use a tool with out the proper accessory retainer.



### Other Tools (e.g. Screwdrivers, Shears, Saws, etc.)

- Specific instructions/warnings affecting this group of tools are contained in product-specific documents accompanying each product.



### Accessories

- Always use accessories of correct size and design for the tool. Tool and accessories must not be modified in any way.
- Never use a tool without the proper accessory retainer.



For more information about ergonomics please ask for the CP Ergosense booklet LT198 or visit [www.chicagopneumatic.com](http://www.chicagopneumatic.com) and look in the Industrial Tools on line catalog



**Sales Contacts:**

**Asia**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**Australia,  
New Zealand**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**Austria**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**Belgium,  
Luxembourg**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**China**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**France**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**Germany**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**India**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**International**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**Italy**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**Netherlands**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**Portugal**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**South Africa**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**Spain**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**United Kingdom**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

**USA, Canada  
and Mexico**

Telephone (000) 000 00 000  
Facsimile (000) 000 00 000

# Worldwide support at all times



Part no xxxxxxxxx Printed in England April 2004 Issue 1  
© Copyright 2004 CP Desoutter HP2 7DR United Kingdom

BSI iso 9001