



Chicago Pneumatic



2666:- 1/2"
5095:- 3/4"
5095:- 1"

ATEX CP6748EX 1/2"
ATEX CP6768EX 3/4"
ATEX CP6778EX 1"

1/2" Art Nr 6151590570
WORKING TORQUE (FWD) 180-760 Nm
MAXIMUM TORQUE (REVERSE) 1085 Nm
FREE SPEED 8400 rpm WEIGHT 2.4 Kg

3/4" Art Nr 6151590580
1" Art Nr 6151590590
WORKING TORQUE (FWD) 400-1400 Nm
MAXIMUM TORQUE (REVERSE) 1750 Nm
FREE SPEED 5100 rpm WEIGHT 4.5 Kg

- ✓ **ULTIMATE PERFORMANCE FOR EXPLOSIVE ENVIRONMENT (ATEX)**
- ✓ **RELIABLE DOUBLE-DOG CLUTCH IN OIL BATH & DURABLE STEEL HOUSING**
- ✓ **POWER REGULATOR 4 SETTINGS & ONE-HAND REVERSE**

***The Best
in it's class
for your
safety!***



DESIGNED FOR INTENSITY USE
Maintenance and Assembly



Energy:
Maintenance operations, also in
explosive environments



Mining and Mineral Processing



Metal Transformation



Manufacturing

**THE BEST
OF SAFETY:**



**UNIQUE
FEATURES**
Premium Tool

ATEX AND IP6 (DUST PROOF) CERTIFIED

INDUSTRIAL TOOLS

FOR GENERAL & INDUSTRIAL MAINTENANCE,
MANUFACTURING & HEAVY PRODUCTION

**SPECIAL OFFER
AUTUMN 2016**

People. Passion. Performance.

The "Classics" reference



CP734H 1/2"
Art nr T024351

BENEFITS

Working Torque (fwd): 34-420 Nm	Working Torque (fwd): 203-949 Nm
Maximum Torque (rev): 576 Nm	Maximum Torque (rev): 1356 Nm
Free speed: 8400 rpm	Free speed: 4200 rpm
Blows per minute: 1020	Blows per minute: 900
Length: 191 mm	Length: 245 mm
Weight : 2.3 kg	Weight : 4.8 kg

1735:-

4681:-



CP772H 3/4"
Art nr T024598



CP8252-R 1/2"
Art nr 6151590250

*Powerful and easy to control
for precise assembly jobs*

BENEFITS

- ✓ Working Torque Range (fwd): 150-750 Nm
- ✓ Maximum Torque (reverse): 950 Nm
- ✓ Free speed: 9000 rpm
- ✓ Blows per minute: 1400
- ✓ Length: 200 mm
- ✓ Weight : 2 kg

2449:-

*Powerful and easy to
control for precise
assembly jobs*

BENEFITS

- ✓ Working Torque Range (fwd): 350-1290 Nm
- ✓ Maximum Torque (reverse): 1630 Nm
- ✓ Free speed: 6300 rpm
- ✓ Blows per minute: 900
- ✓ Length: 222 mm
- ✓ Weight : 5.5 and 5,6 kg

Compact, Robust & Powerful

CP6763 3/4"
Art nr 6151590400

CP6773 1"
Art nr 6151590410

3476:-



BENEFITS

- ✓ Working Torque Range (fwd): 1220-2440 Nm
- ✓ Maximum Torque (reverse): 3790 Nm
- ✓ Free speed: 3500 rpm
- ✓ Blows per minute: 650
- ✓ Length: 272 mm
- ✓ Weight: 10.5 kg

22894:-

CP0611P RS 1"
Art nr 6151590070

The Best Super Industrial 1"



BENEFITS

- ✓ Working Torque Range (fwd): 1220-2440 Nm
- ✓ Maximum Torque (reverse): 3790 Nm
- ✓ Free speed: 3500 rpm
- ✓ Blows per minute: 1020
- ✓ Length: 360 mm
- ✓ Weight: 10.4 kg

26720:-

CP0611-D28H 1"
Art nr 6151590160

MATERIAL REMOVAL

GOOD BETTER BEST



**POWERFUL &
EFFICIENT
HIGH DURABILIT**

2226:-

CP7550-A

Art nr 8941075503

- ✓ Wheel size:..... 125 mm
- ✓ Spindle thread:..... M14
- ✓ Free speed:..... 12000 rpm
- ✓ Power:..... 840 W
- ✓ Weight:..... 1,6 kg



**LOW PROFILE
ANGLE HEAD
DESIGN**

3973:-

CP3450-12AA5

Art nr 6151604040

- ✓ Wheel size:..... 125 mm
- ✓ Spindle thread:..... M14
- ✓ Free speed:..... 12000 rpm
- ✓ Power:..... 810 W
- ✓ Weight:..... 1,7 kg



**HIGH POWER
AND TORQUE
MOTOR**

8781:-

CP3650-120AA5VK

Art nr 6151607180

- ✓ Wheel size:..... 125 mm
- ✓ Spindle thread:..... M14
- ✓ Free speed:..... 12000 rpm
- ✓ Power:..... 1700 W
- ✓ Weight:..... 1,9 kg

High performance Industrial die grinder in a compact package



CP3019-22 CNOMO

Art nr 6151600410

7203:-

- BENEFITS**
- ✓ Collet size: 6 mm
 - ✓ Free speed: 22000 rpm
 - ✓ Power: 900 W

✓ Length & Weight: 222 - 363 mm, 1.0 - 1.4 kg



CP3019-22ES CNOMO

Art nr 6151602280

8510:-



**Angel Grinder
CP3019-12AC**



**Sander
CP3019-20AF**



**Sander
CP3019-12AF**

MODEL	PART NUMBER	FREE SPEED	POWER	PAD Ø	COLLET SIZE	SPINDLE THREAD	FREE SPEED AIR CONS.	ACTUAL AIR CONS.	NET WEIGHT	AIR INLET	PRICE
		rpm	W	mm	mm	in.	l/s	l/s	kg	NPT	
CP3019-12AC	615 160 4070	12.000	375	---	6.35	---	3.2	8.0	0.51	1/4"	5822:-
CP3019-20AF	615 160 7090	20.000	375	75	---	1/4" UNC	8.3	3.0	0.63	1/4"	5778:-
CP3019-12AF	615 160 7080	12.000	375	75	---	1/4" UNC	9.3	5.7	0.63	1/4"	5778:-

PART NUMBER	CAPACITY	PRICE
205 054 9913	2" (50mm)	89:-

*High performance in
a compact package*

KINGS OF REMOVAL

SUPERIOR TORQUE FOR MAXIMUM PRODUCTIVITY



CP3850-85AH7VE

Art nr 6151704930

- ✓ Wheel size: 180 mm
- ✓ Spindle thread: HEX
- ✓ Free speed: 8500 rpm
- ✓ Power: 21000 W
- ✓ Weight: 2,70 kg

10427:-

CP3850-65AH9VE

Art nr 6151704950

- ✓ Wheel size: 230 mm
- ✓ Spindle thread: HEX
- ✓ Free speed: 6500 rpm
- ✓ Power: 2100 W
- ✓ Weight: 2,90 kg

10905:-



CP3349-SALAVELE

Art nr 6151609130

*Superlative performance
in heavy applications*



BENEFITS

- ✓ Spindle thread: 5/8-11
- ✓ Wheel size: 230 mm
- ✓ Free speed: 6500 rpm
- ✓ Power: 3000 W
- ✓ Length: 280 mm
- ✓ Weight : 4.4 kg

12761:-



CP3650-085AB
Art nr 6151620190

BENEFITS

- ✓ Pad type: H&L
- ✓ Pad diameter: 180 mm
- ✓ Free speed: 8500 rpm
- ✓ Power: 1700 W
- ✓ Length: 238 mm
- ✓ Weight : 1.39 kg

*High performance
& ergonomic
angle sander*

7350:-

BENEFITS

- ✓ Operator comfort thanks to exclusive ergonomic features
- ✓ Chuck capacity: 10 mm
- ✓ Free speed: 2600 rpm
- ✓ Power: 750 W
- ✓ Length: 210 mm
- ✓ Net weight: 0.99 kg

*High power, Durability
& Precision,
Keyless chuck*

2595:-



CP1117P26
Art nr 6151580140

BENEFITS

- ✓ Improve your productivity thanks to high power
- ✓ Chuck capacity: 13 mm
- ✓ Free speed: 900 rpm
- ✓ Power: 750 W
- ✓ Length: 203 mm
- ✓ Net weight: 1,0 kg

*Designed for
intensive duty
and high durability*

2812:-



CP1117P09
Art nr 6151580150

BENEFITS

- ✓ Improve your productivity thanks to high power
- ✓ Chuck capacity: 13 mm
- ✓ Free speed: 500 rpm
- ✓ Power: 750 W
- ✓ Length: 203 mm
- ✓ Net weight: 1.53 kg

*Designed for
intensive duty
and high durability*

2812:-



CP1117P05
Art nr 6151580170

BENEFITS

- ✓ Ideal for drilling of mild steel, cast iron
- ✓ Chuck capacity: 16 mm
- ✓ Free speed: 800 rpm
- ✓ Power: 750 W
- ✓ Length: 364 mm
- ✓ Net weight: 3.70 kg

*High power,
Durability,
D-Handle*

5366:-



CP1816
Art nr 6151580300



BENEFITS

- ✓ Blows per minute: 3800
- ✓ Bore - Stroke: 18 mm - 30 mm
- ✓ Power: 2.9 joule
- ✓ Chisel rivet set shank: 12.7 mm
- ✓ Length - Weight: 201 mm - 1.5 kg

B15B

Art nr 6151740230

*Great accessibility for hard
to reach areas*

2289:-



BENEFITS

- ✓ Blows per minute: 2400
- ✓ Bore - Stroke: 23.5 mm - 11 mm
- ✓ Power: 1.8 joule
- ✓ Chisel rivet set shank: 12.7 mm
- ✓ Length - Weight: 425 mm - 2.8 kg

B16BV

Art nr 6151740510

Vibration-damped straight chipper

3310:-



BENEFITS

- Good power/weight ratio
- Blows per minute: 2400
- Bore - Stroke: 23.5 mm - 11 mm
- Power: 1.8 joule
- Needle capacity: 19 x 1/8 (3)
- Length - Weight: 340 mm - 2.7 kg

CP7115

Art nr 8941071150

Compact to reach small areas

941:-

BENEFITS

- Good power/weight ratio
- Blows per minute: 4000
- Bore - Stroke: 14 mm - 32 mm
- Power: 2.2 joule
- Needle capacity: 12 x 1/8 (3)
- Length - Weight: 290 mm - 1.3 kg

B18MV

Art nr 6151740520

*Pistol vibration-damped
needle scaler*

3402:-



CP9780

Art nr 6151939780

Easy handling & large removal

BENEFITS

- ✓ Quick-change belt replacement
- ✓ Paper size: 20x520
- ✓ Free speed: 20000 rpm
- ✓ Power: 380 W
- ✓ Length: 380 mm
- ✓ Weight : 1.5 kg

2124:-

HOSE REELS


A

- Extreme Robustness
- Made for All Purposes
- Adapted even to Industrial Uses


B

- Open
- More adapted to dirty environments
- Still Great Robustness and For All Purposes



PIC. REF	DESCRIPTION	PART NUMBER	THREAD	HOSE LENGTH (m)	Ø INT. (mm)	MATERIAL	PRICE
A	BSP HR8108	8940171991	1/4"	10	8	Composite	1599:-
A	BSP HR8208	8940171995	1/4"	10	8	Aluminum	1976:-
A	BSP HR8110	8940171993	1/4"	16	10	Composite	2290:-
A	BSP HR8210	8940171997	1/4"	16	10	Aluminum	2975:-
B	BSP HR9110	8940172001	3/8"	21	10	Composite	4296:-
A	BSP HR8113	8940171999	1/2"	16	13	Composite	3298:-
B	BSP HR9113	8940172003	1/2"	16	13	Composite	4590:-

AIR FLEX

Aimed to improve the working ergonomcy, Air flex connectors can rotate 360° eliminating efforts when working in cramped spaces



MODEL	PART NUMBER	RECOMMENDED FLOW - MAX	PRICE
		l/s	
1/4"	894 017 1568	12	450:-
3/8"	894 017 1570	35	599:-
1/2"	894 017 1566	35	599:-

SWIVEL



Aimed to improve the working ergonomcy, Air flex connectors can rotate 360° eliminating efforts when working in cramped spaces.

MODEL	PART NUMBER	PRICE
SWIVEL	894 015 8412	146:-

BLOW GUN

DESCRIPTION	PART NUMBER	PRICE
Blow gun standard	615 811 2690	119:-
Blow gun standard silencer	615 811 2700	125:-
Blow gun extended nozzle	615 811 2710	119:-
Blow gun extended nozzle silencer	615 811 2720	159:-




OIL AND GLOVES



DESCRIPTION	PART NUMBER	PRICE
Air Tool Oil - 120 ml	CA149661	26:-
CP Gloves L	8940158618	299:-
CP Gloves XL	8940158619	299:-

COUPLINGS AND FILTERS, REGULATORS, LUBRICATORS (FRL) – CHECK OUR MAIN CATALOG

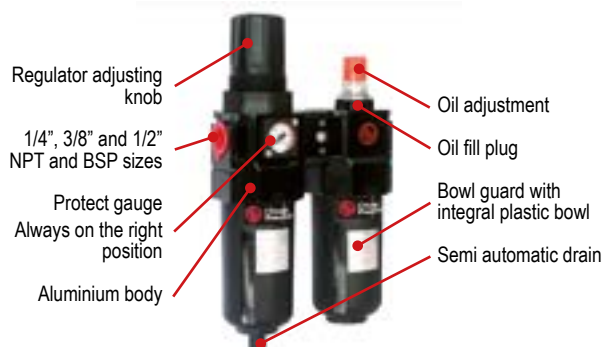



TITAN
BY CHICAGO PNEUMATIC

**Titan hydraulic
torque wrenches:
T Series**

More info at: www.titanti.com


**Easily find the tools you need
to get the job done!**



CP ToolBox



Get the free CP ToolBox
Scan this QR code or visit www.cp.com/app

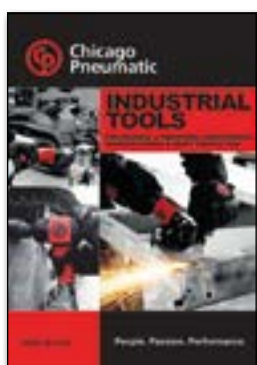

ORDER DIREKT:
order@mk-produkter.se

MK-Produkt AB
Box 8, 183 21 Täby
Tel: 08-514 00 550
Email: info@mk-produkter.se •
order@mk-produkter.se

