



# Chicago Pneumatic



**2666:- 1/2"**  
**5095:- 3/4"**  
**5095:- 1"**

**ATEX CP6748EX 1/2"**  
**ATEX CP6768EX 3/4"**  
**ATEX CP6778EX 1"**

**1/2" Art Nr 6151590570**  
**WORKING TORQUE (FWD) 180-760 Nm**  
**MAXIMUM TORQUE (REVERSE) 1085 Nm**  
**FREE SPEED 8400 rpm WEIGHT 2.4 Kg**

**3/4" Art Nr 6151590580**  
**1" Art Nr 6151590590**  
**WORKING TORQUE (FWD) 400-1400 Nm**  
**MAXIMUM TORQUE (REVERSE) 1750 Nm**  
**FREE SPEED 5100 rpm WEIGHT 4.5 Kg**

- ✓ **ULTIMATE PERFORMANCE FOR EXPLOSIVE ENVIRONMENT (ATEX)**
- ✓ **RELIABLE DOUBLE-DOG CLUTCH IN OIL BATH & DURABLE STEEL HOUSING**
- ✓ **POWER REGULATOR 4 SETTINGS & ONE-HAND REVERSE**

***The Best  
in it's class  
for your  
safety!***



**DESIGNED FOR INTENSITY USE**  
Maintenance and Assembly



**Energy:**  
Maintenance operations, also in  
explosive environments



**Mining and Mineral Processing**



**Metal Transformation**



**Manufacturing**

**THE BEST  
OF SAFETY:**



**UNIQUE  
FEATURES**  
Premium Tool

**ATEX AND IP6 (DUST PROOF) CERTIFIED**

## INDUSTRIAL TOOLS

FOR GENERAL & INDUSTRIAL MAINTENANCE,  
MANUFACTURING & HEAVY PRODUCTION

**SPECIAL OFFER  
AUTUMN 2016**

**People. Passion. Performance.**

## *The "Classics" reference*



**CP734H 1/2"**  
Art nr T024351

### BENEFITS

Working Torque (fwd): 34-420 Nm	Working Torque (fwd): 203-949 Nm
Maximum Torque (rev): 576 Nm	Maximum Torque (rev): 1356 Nm
Free speed: 8400 rpm	Free speed: 4200 rpm
Blows per minute: 1020	Blows per minute: 900
Length: 191 mm	Length: 245 mm
Weight : 2.3 kg	Weight : 4.8 kg

**1735:-**

**4681:-**



**CP772H 3/4"**  
Art nr T024598



**CP8252-R 1/2"**  
Art nr 6151590250

*Powerful and easy to control  
for precise assembly jobs*

### BENEFITS

- ✓ Working Torque Range (fwd): 150-750 Nm
- ✓ Maximum Torque (reverse): 950 Nm
- ✓ Free speed: 9000 rpm
- ✓ Blows per minute: 1400
- ✓ Length: 200 mm
- ✓ Weight : 2 kg

**2449:-**

*Powerful and easy to  
control for precise  
assembly jobs*

### BENEFITS

- ✓ Working Torque Range (fwd): 350-1290 Nm
- ✓ Maximum Torque (reverse): 1630 Nm
- ✓ Free speed: 6300 rpm
- ✓ Blows per minute: 900
- ✓ Length: 222 mm
- ✓ Weight : 5.5 and 5,6 kg

*Compact, Robust & Powerful*

**CP6763 3/4"**  
Art nr 6151590400

**CP6773 1"**  
Art nr 6151590410

**3476:-**



### BENEFITS

- ✓ Working Torque Range (fwd): 1220-2440 Nm
- ✓ Maximum Torque (reverse): 3790 Nm
- ✓ Free speed: 3500 rpm
- ✓ Blows per minute: 650
- ✓ Length: 272 mm
- ✓ Weight: 10.5 kg

**22894:-**

**CP0611P RS 1"**  
Art nr 6151590070

## *The Best Super Industrial 1"*



### BENEFITS

- ✓ Working Torque Range (fwd): 1220-2440 Nm
- ✓ Maximum Torque (reverse): 3790 Nm
- ✓ Free speed: 3500 rpm
- ✓ Blows per minute: 1020
- ✓ Length: 360 mm
- ✓ Weight: 10.4 kg

**26720:-**

**CP0611-D28H 1"**  
Art nr 6151590160



# MATERIAL REMOVAL

## GOOD BETTER BEST



**POWERFUL &  
EFFICIENT  
HIGH DURABILIT**

**2226:-**

### CP7550-A

Art nr 8941075503

- ✓ Wheel size:..... 125 mm
- ✓ Spindle thread:..... M14
- ✓ Free speed:..... 12000 rpm
- ✓ Power:..... 840 W
- ✓ Weight:..... 1,6 kg



**LOW PROFILE  
ANGLE HEAD  
DESIGN**

**3973:-**

### CP3450-12AA5

Art nr 6151604040

- ✓ Wheel size:..... 125 mm
- ✓ Spindle thread:..... M14
- ✓ Free speed:..... 12000 rpm
- ✓ Power:..... 810 W
- ✓ Weight:..... 1,7 kg



**HIGH POWER  
AND TORQUE  
MOTOR**

**8781:-**

### CP3650-120AA5VK

Art nr 6151607180

- ✓ Wheel size:..... 125 mm
- ✓ Spindle thread:..... M14
- ✓ Free speed:..... 12000 rpm
- ✓ Power:..... 1700 W
- ✓ Weight:..... 1,9 kg

*High performance Industrial die grinder in a compact package*



### CP3019-22 CNOMO

Art nr 6151600410

**7203:-**

- BENEFITS**
- ✓ Collet size: 6 mm
  - ✓ Free speed: 22000 rpm
  - ✓ Power: 900 W

✓ Length & Weight: 222 - 363 mm, 1.0 - 1.4 kg



### CP3019-22ES CNOMO

Art nr 6151602280

**8510:-**





**Angel Grinder  
CP3019-12AC**



**Sander  
CP3019-20AF**



**Sander  
CP3019-12AF**

MODEL	PART NUMBER	FREE SPEED	POWER	PAD Ø	COLLET SIZE	SPINDLE THREAD	FREE SPEED AIR CONS.	ACTUAL AIR CONS.	NET WEIGHT	AIR INLET	PRICE
		rpm	W	mm	mm	in.	l/s	l/s	kg	NPT	
CP3019-12AC	615 160 4070	12.000	375	---	6.35	---	3.2	8.0	0.51	1/4"	<b>5822:-</b>
CP3019-20AF	615 160 7090	20.000	375	75	---	1/4" UNC	8.3	3.0	0.63	1/4"	<b>5778:-</b>
CP3019-12AF	615 160 7080	12.000	375	75	---	1/4" UNC	9.3	5.7	0.63	1/4"	<b>5778:-</b>

PART NUMBER	CAPACITY	PRICE
205 054 9913	2" (50mm)	<b>89:-</b>

*High performance in  
a compact package*

# KINGS OF REMOVAL

**SUPERIOR TORQUE FOR MAXIMUM PRODUCTIVITY**



**CP3850-85AH7VE**

Art nr 6151704930

- ✓ Wheel size: ..... 180 mm
- ✓ Spindle thread: .... HEX
- ✓ Free speed: ..... 8500 rpm
- ✓ Power: ..... 21000 W
- ✓ Weight: ..... 2,70 kg

**10427:-**

**CP3850-65AH9VE**

Art nr 6151704950

- ✓ Wheel size: ..... 230 mm
- ✓ Spindle thread: .... HEX
- ✓ Free speed: ..... 6500 rpm
- ✓ Power: ..... 2100 W
- ✓ Weight: ..... 2,90 kg

**10905:-**



**CP3349-SALAVELE**

Art nr 6151609130

*Superlative performance  
in heavy applications*



## BENEFITS

- ✓ Spindle thread: 5/8-11
- ✓ Wheel size: 230 mm
- ✓ Free speed: 6500 rpm
- ✓ Power: 3000 W
- ✓ Length: 280 mm
- ✓ Weight : 4.4 kg

**12761:-**



**CP3650-085AB**  
Art nr 6151620190

#### BENEFITS

- ✓ Pad type: H&L
- ✓ Pad diameter: 180 mm
- ✓ Free speed: 8500 rpm
- ✓ Power: 1700 W
- ✓ Length: 238 mm
- ✓ Weight : 1.39 kg

*High performance  
& ergonomic  
angle sander*

**7350:-**

#### BENEFITS

- ✓ Operator comfort thanks to exclusive ergonomic features
- ✓ Chuck capacity: 10 mm
- ✓ Free speed: 2600 rpm
- ✓ Power: 750 W
- ✓ Length: 210 mm
- ✓ Net weight: 0.99 kg

*High power, Durability  
& Precision,  
Keyless chuck*

**2595:-**



**CP1117P26**  
Art nr 6151580140

#### BENEFITS

- ✓ Improve your productivity thanks to high power
- ✓ Chuck capacity: 13 mm
- ✓ Free speed: 900 rpm
- ✓ Power: 750 W
- ✓ Length: 203 mm
- ✓ Net weight: 1,0 kg

*Designed for  
intensive duty  
and high durability*

**2812:-**



**CP1117P09**  
Art nr 6151580150

#### BENEFITS

- ✓ Improve your productivity thanks to high power
- ✓ Chuck capacity: 13 mm
- ✓ Free speed: 500 rpm
- ✓ Power: 750 W
- ✓ Length: 203 mm
- ✓ Net weight: 1.53 kg

*Designed for  
intensive duty  
and high durability*

**2812:-**



**CP1117P05**  
Art nr 6151580170

#### BENEFITS

- ✓ Ideal for drilling of mild steel, cast iron
- ✓ Chuck capacity: 16 mm
- ✓ Free speed: 800 rpm
- ✓ Power: 750 W
- ✓ Length: 364 mm
- ✓ Net weight: 3.70 kg

*High power,  
Durability,  
D-Handle*

**5366:-**



**CP1816**  
Art nr 6151580300





## BENEFITS

- ✓ Blows per minute: 3800
- ✓ Bore - Stroke: 18 mm - 30 mm
- ✓ Power: 2.9 joule
- ✓ Chisel rivet set shank: 12.7 mm
- ✓ Length - Weight: 201 mm - 1.5 kg

### **B15B**

Art nr 6151740230

*Great accessibility for hard to reach areas*

**2289:-**



## BENEFITS

- ✓ Blows per minute: 2400
- ✓ Bore - Stroke: 23.5 mm - 11 mm
- ✓ Power: 1.8 joule
- ✓ Chisel rivet set shank: 12.7 mm
- ✓ Length - Weight: 425 mm - 2.8 kg

### **B16BV**

Art nr 6151740510

*Vibration-damped straight chipper*

**3310:-**



## BENEFITS

- Good power/weight ratio
- Blows per minute: 2400
- Bore - Stroke: 23.5 mm - 11 mm
- Power: 1.8 joule
- Needle capacity: 19 x 1/8 (3)
- Length - Weight: 340 mm - 2.7 kg

### **CP7115**

Art nr 8941071150

*Compact to reach small areas*

**941:-**

## BENEFITS

- Good power/weight ratio
- Blows per minute: 4000
- Bore - Stroke: 14 mm - 32 mm
- Power: 2.2 joule
- Needle capacity: 12 x 1/8 (3)
- Length - Weight: 290 mm - 1.3 kg

### **B18MV**

Art nr 6151740520

*Pistol vibration-damped needle scaler*

**3402:-**



### **CP9780**

Art nr 6151939780

*Easy handling & large removal*

## BENEFITS

- ✓ Quick-change belt replacement
- ✓ Paper size: 20x520
- ✓ Free speed: 20000 rpm
- ✓ Power: 380 W
- ✓ Length: 380 mm
- ✓ Weight : 1.5 kg

**2124:-**

## HOSE REELS


**A**

- Extreme Robustness
- Made for All Purposes
- Adapted even to Industrial Uses


**B**

- Open
- More adapted to dirty environments
- Still Great Robustness and For All Purposes

PIC. REF	DESCRIPTION	PART NUMBER	THREAD	HOSE LENGTH (m)	Ø INT. (mm)	MATERIAL	PRICE
A	BSP HR8108	8940171991	1/4"	10	8	Composite	1599:-
A	BSP HR8208	8940171995	1/4"	10	8	Aluminum	1976:-
A	BSP HR8110	8940171993	1/4"	16	10	Composite	2290:-
A	BSP HR8210	8940171997	1/4"	16	10	Aluminum	2975:-
B	BSP HR9110	8940172001	3/8"	21	10	Composite	4296:-
A	BSP HR8113	8940171999	1/2"	16	13	Composite	3298:-
B	BSP HR9113	8940172003	1/2"	16	13	Composite	4590:-

## AIR FLEX

Aimed to improve the working ergonomy, Air flex connectors can rotate 360° eliminating efforts when working in cramped spaces



MODEL	PART NUMBER	RECOMMENDED FLOW - MAX	PRICE
		l/s	
1/4"	894 017 1568	12	450:-
3/8"	894 017 1570	35	599:-
1/2"	894 017 1566	35	599:-

## SWIVEL



Aimed to improve the working ergonomy, Air flex connectors can rotate 360° eliminating efforts when working in cramped spaces.

MODEL	PART NUMBER	PRICE
SWIVEL	894 015 8412	146:-

## BLOW GUN

DESCRIPTION	PART NUMBER	PRICE
Blow gun standard	615 811 2690	119:-
Blow gun standard silencer	615 811 2700	125:-
Blow gun extended nozzle	615 811 2710	119:-
Blow gun extended nozzle silencer	615 811 2720	159:-




## OIL AND GLOVES



DESCRIPTION	PART NUMBER	PRICE
Air Tool Oil - 120 ml	CA149661	26:-
CP Gloves L	8940158618	299:-
CP Gloves XL	8940158619	299:-

## COUPLINGS AND FILTERS, REGULATORS, LUBRICATORS (FRL) – CHECK OUR MAIN CATALOG

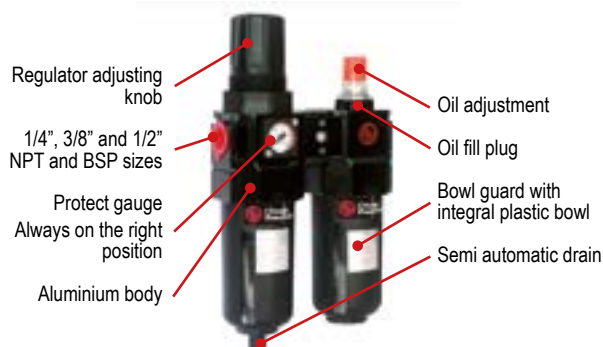





**TITAN**  
BY CHICAGO PNEUMATIC

**Titan hydraulic  
torque wrenches:  
T Series**

More info at: [www.titanti.com](http://www.titanti.com)


**Easily find the tools you need  
to get the job done!**



**CP ToolBox**



**Get the free CP ToolBox**  
Scan this QR code or visit [www.cp.com/app](http://www.cp.com/app)

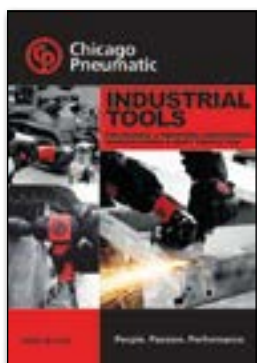

Order the complete catalogue at  
[order.seo@cp.com](mailto:order.seo@cp.com) or from your dealer.

**ORDER DIRECT:  
[ORDER.SEO@CP.COM](mailto:ORDER.SEO@CP.COM)**

**THE NEAREST DEALERS:  
+46 (0)525 35255**

**CHICAGO PNEUMATIC TOOLS DIVISION**

Västgötavägen 30, 451 34 UDDEVALLA

Tel: + 46 (0) 525 352 55

Email: [info.seo@cp.com](mailto:info.seo@cp.com) • [order.seo@cp.com](mailto:order.seo@cp.com)

Distributor



**Chicago  
Pneumatic**

[www.cp.com](http://www.cp.com)